

RNE、RNE-H SERIES

RNE、RNE-H系列



非隔离-三合一调光双极无频闪-工矿灯驱动, 无余光设计
Non-isolation-three in one dimming Bipolar de strobo-
scopic-Mining lamp drive, No afterglow design

- ▶ 输入电压/Input Voltage: RNE=100-277Vac; RNE-H=120-347Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 雷击浪涌/Surge Protection: 6KV/6KV
- ▶ 电流可调节/Current adjustable
- ▶ 选配功能/Optional function:
 - I: 三合一隔离调光(0-10V/PWM/Resistor), 0V可关断/
Three-in-one isolation dimming (0-10V/PWM/Resistor), 0V can be turned off
 - II: 12V-200mA独立辅助源/12V-200mA Independent auxiliary source
 - III: 调功率, 调色温/Power regulation, Tinting temperature
 - IV: WIFI蓝牙模块/WIFI bluetooth module
 - V: 2.4G模块/2.4G module
 - VI: 光控/Optical control


产品功率 Product power

80W 100W 120W
150W 200W 240W


应用灯具 Application luminaire

工矿灯 mining lamp

产品尺寸 Product Size

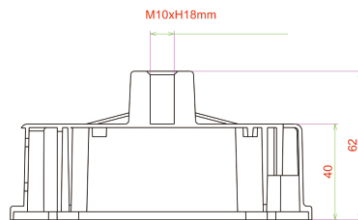

单位/Unit: mm



型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率(@230V) Efficiency(@230V)	雷击浪涌 Surge Protection	外壳尺寸 (mm) dimensions (mm)
RNE-080#-040-XV*	80W	160-260V	0.16-0.4A	≥0.90	≥94%	6KV/6KV	Φ 127X(113)XH62
RNE-100#-050-XV*	100W	160-260V	0.2-0.5A	≥0.90	≥94%	6KV/6KV	Φ 127X(113)XH62
RNE-120#-060-XV*	120W	160-260V	0.35-0.6A	≥0.90	≥95%	6KV/6KV	Φ 127X(113)XH62
RNE-150#-075-XV*	150W	160-260V	0.52-0.75A	≥0.90	≥95%	6KV/6KV	Φ 127X(113)XH62
RNE-200#-100-XV*	200W	160-260V	0.75-1A	≥0.90	≥95%	6KV/6KV	Φ 127X(113)XH62
RNE-240#-120-XV*	240W	160-260V	0.84-1.2A	≥0.90	≥95%	6KV/6KV	Φ 127X(113)XH62

Model RNE-080#, #=L is 100-277Vac; #=H is 120-347Vac