

NE SERIES

NE 系列



隔离-三合一调光-户外驱动

isolation-three in one dimming-Outdo or drive

- ▶ 输入电压/Input Voltage: 100-277Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 雷击浪涌/Surge Protection: 4KV (6KV/10KV 可选)
- ▶ 电流可调节/Current adjustable
- ▶ 功能配置/Function configuration:
 - I : 三合一隔离调光(0-10V/PWM/Resistor), 0V可关断/
Three-in-one isolation dimming (0-10V/PWM/Resistor), 0V can be turned off
 - II : 12V - 200mA独立辅助源/
12V-200mA Independent auxiliary source

产品功率 Product power

15W 25W 35W 45W
50W 60W 100W


应用灯具 Application luminaire

植物照明, 路灯, 隧道灯, 停车场, 商业照明
Plant lighting, Street lamp, Tunnel lamp,
Parking garages, commercial lighting





产品尺寸 Product Size

单位/Unit: mm



15W

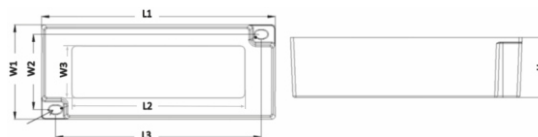

Model NO.	L1	L2	L3	W1	W2	W3	H
25W/45W	90	65	79.93	48	39.4	26	27.5
35W	113	83.99	102	47	39.4	26	30
50W/60W	95	/	85	70	60	/	32



型号参数列表 Model Parameter List

产品型号 Product Model	输出功率 PO	输出电压 Vout	输出电流 Lout	功率因素 PF	效率(@230V) Efficiency(@230V)	雷击浪涌 Surge Protection	外壳尺寸(mm) dimensions (mm)
NE015040YYY-XG	15W	21-40V	450mA	≥0.90	≥86%	4KV	L64.6XW54XH26.2
NE025040YYY-XG	25W	21-40V	625mA	≥0.90	≥87%	4KV	L90XW48XH27.5
NE035040YYY-XG	35W	21-40V	875mA	≥0.90	≥87%	4KV	L113.6XW47XH30
NE045040YYY-XG	45W	21-40V	1A	≥0.90	≥85%	4KV	L90XW48XH27.5
NE045040YYY-XG	50W	21-40V	1.25A	≥0.90	≥87%	6KV	L95XW70XH32
NE060040YYY-XG	60W	21-40V	1.5A	≥0.90	≥87%	6KV	L95XW70XH32
NE100VYYY-XG	100W	21-54V	2.4A	≥0.90	≥87%	6KV/10KV	L155XW60XH33