

# NIS SERIES

## NIS系列



### 非隔离-光控驱动

### Non-isolation-optical Light control drive

- ▶ 输入电压/Input Voltage: 100-277Vac
- ▶ 输入频率/Input Frequency: 50/60Hz
- ▶ 雷击浪涌/Surge Protection: 2KV/4KV
- ▶ 功能配置/Function configuration: 光控/Optical control


### 产品功率 Product power

18W 28W 30W  
50W 60W 70W

### 应用灯具 Application luminaire

室外道路照明、建筑照明、停车场、商业照明  
Outdoor street and area lighting, Architectural lighting, Parking garages, commercial lighting

### 产品尺寸 Product Size

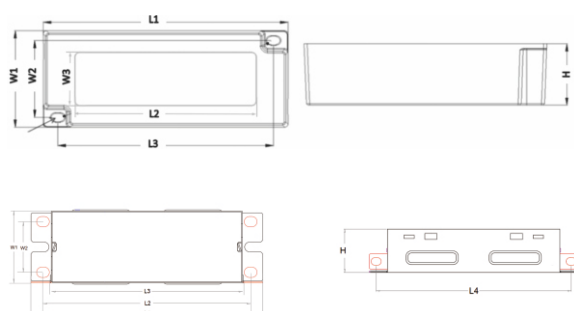

单位/Unit: mm

| Model NO. | L1  | L2    | L3    | W1   | W2   | W3 | H    |
|-----------|-----|-------|-------|------|------|----|------|
| 28/30W    | 66  | /     | 57.5  | 33.8 | 27.5 | /  | 21.3 |
| 50W       | 90  | 65    | 79.93 | 48   | 39.4 | 26 | 27.5 |
| 70W       | 113 | 83.99 | 102   | 47   | 39.4 | 26 | 30   |

| Model NO. | L1  | L2    | L3  | L4  | W1 | W2 | H  |
|-----------|-----|-------|-----|-----|----|----|----|
| 60W       | 120 | 107.5 | 100 | 112 | 38 | 26 | 26 |

### 型号参数列表 Model Parameter List

| 产品型号<br>Product Model | 输出功率<br>PO | 输出电压<br>Vout | 输出电流<br>Lout | 功率因素<br>PF | 效率(@230V)<br>Efficiency(@230V) | 雷击浪涌<br>Surge Protection | 外壳尺寸 (mm)<br>dimensions (mm) |
|-----------------------|------------|--------------|--------------|------------|--------------------------------|--------------------------|------------------------------|
| IS015062YYY-WXF       | 18W        | 36-62V       | 250mA        | ≥0.90      | ≥90%                           | 2KV                      | L65(52)XW30XH21              |
| IS025062YYY-WXF       | 28W        | 36-62V       | 450mA        | ≥0.90      | ≥90%                           | 2KV                      | L66XW33.8XH21.3              |
| IS025062YYY-WXF       | 30W        | 36-62V       | 450mA        | ≥0.90      | ≥90%                           | 2KV                      | L66XW33.8XH21.3              |
| IS050062YYY-WXF       | 50W        | 36-62V       | 810mA        | ≥0.90      | ≥90%                           | 2KV/4KV                  | L90XW48XH27.5                |
| IS060062YYY-WXF       | 60W        | 36-62V       | 900mA        | ≥0.90      | ≥90%                           | 4KV                      | L120(100)XW38XH26            |
| IS070062YYY-WXF       | 70W        | 36-62V       | 1.13A        | ≥0.90      | ≥90%                           | 2KV/4KV                  | L113.6XW47XH30               |